
TOP WING ASSEMBLY LINE

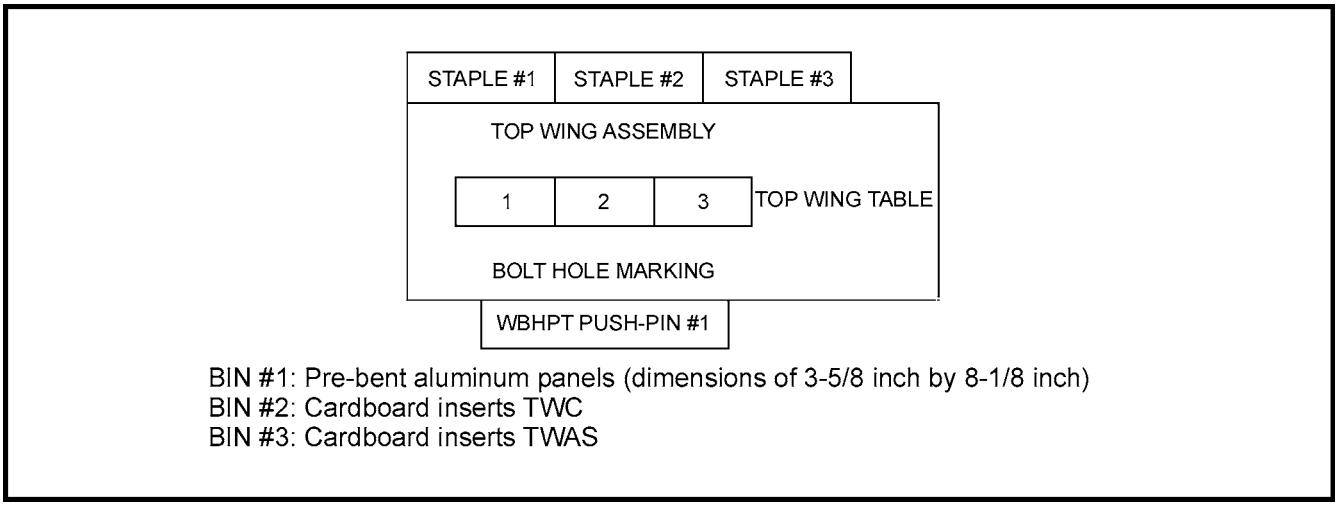

Director Cadets 3, 2007, Ottawa, ON: Department of National Defence

Figure AD-1 Top Wing Assembly Line


For each aluminum model biplane to be constructed:

1. Combine cardboard parts TWC, TWAS and three pre-bent aluminum panels (dimensions of 3-5/8 inch by 8-1/8 inch) to form top wing (all from stock).

2. Insert panels (dimensions of 2-5/8 inch by 8-1/8 inch) under wing (from stock).

3. Staple top wing (ten staples).

4. Apply Wing Bolt Hole Placement Template (WBHPT) to top of top wing and with a push-pin, make eight holes for bolts in the top wing (top wing to stock).

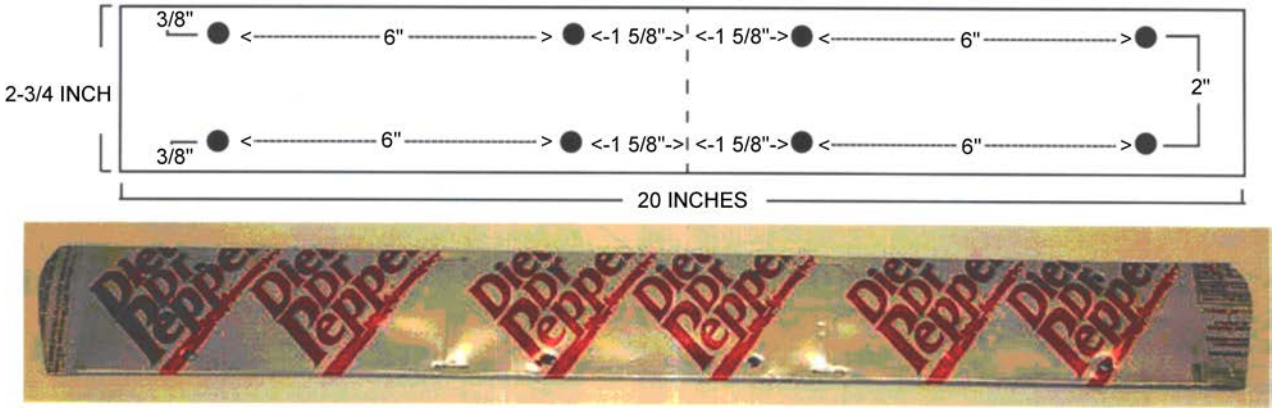

D. P. Mathis, Building the B.C. Air Originals Biplane, B.C. Air Originals (p. 12)

Figure AD-2 Wing Bolt Hole Placement Template (WBHPT)

Unofficial convenience copy of A-CR-CCP-803/PF-001, cached 2026-11-08 from https://app.cadets.gc.ca/cadet-publications/A-CR-CCP-803-PF-001/A-CR-CCP-803-PF-001.pdf.
Verify against the official publication.

THIS PAGE INTENTIONALLY LEFT BLANK

Unofficial convenience copy of A-CR-CCP-803/PF-001, cached 2026-11-08 from https://app.cadets.gc.ca/cadet-publications/A-CR-CCP-803-PF-001/A-CR-CCP-803-PF-001.pdf.
Verify against the official publication.